



报告编号(Report ID): MLIC3ITB97275521

UN38.3 测试报告 UN38.3 Test Report

Sample Description & Model	Lithium-Ion Battery 7S3P ICR18650
Applicant	AccuPowerForschungs- Entwicklungs- und Vertriebs- GmbH
Manufacturer	AccuPowerForschungs- Entwicklungs- und Vertriebs- GmbH



No.: MLIC3ITB97275521

Code: j9s88wg





Pony Testing International Group

I. SAMPLE DESCRIPTION

Sample Description		Lithiu	m-Ion Battery	Sample Model	7S3P ICR1	18650
Applicant			AccuPowerForschun	gs- Entwicklungs-	und Vertriebs- GmbH	
Manufacturer			AccuPowerForschun	gs- Entwicklungs-	und Vertriebs- GmbH	
Nominal Voltage	25	.9V	Rated Capacity	6.6Ah	Limited Charge Voltage	29.4V
Charge Current	3	A	Maximum Continuous Charge Current	5A	End Charge Current	100mA
Cut-off Voltage	21V		Maximum Discharge Current	10A	Use	
Cell Number In Each Battery	21PCS		Cell Model	ICR18650-22P	Cell Capacity	2.2Ah
Electrochemistry System				Li-Co		
Manufacturer of ce	SAMSUNG					
Entrust date 20			2017-11-10	Finished date	2017-11	-24

II、TEST METHOD

UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Manual of Tests and Criteria (ST/SG/AC.10/11/Rev.6), Part III sub-section.

III、TEST ITEM

1. Altitude simulation

2. Thermal test

Vibration 3.

Shock

5. External short circuit

6. Impact

Overcharge 7.

Forced discharge

IV, CONCLUSION

ITEM	SAMPLE NUMBER	STANDARD	CONCLUSION
Altitude simulation			PASS
Thermal test	NI NI		PASS
Vibration	N1~N4 C1~C4		PASS
Shock		UN38.3	PASS
External short circuit		ST/SG/AC.10/11/Rev.6	PASS
Impact	N9~N13		PASS
Overcharge	N5~N8 C5~C8		PASS
Forced discharge	N14~N23 C9~C18		PASS

The Samples has passed the test items of UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Manual of Tests and Criteria (ST/SG/AC.10/11/Rev.6), Part III sub-section.

Checker: Mchan, Approver: Vishaubin

Issue Date: November 24, 2017



CHotline 400-819-5688 www.ponytest.com Pony Testing International Group Shenzhen Co., Ltd. Address: 1F., Building 6, Zhongxing Industry City, Chuangye Road, Nanshan District, Shenzhen, Guangdong, China

北京实验室: (010)82618116

上海实验室: (021)64851999 长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618

苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 西安实验室: (029)89608785

合肥实验室: (0551)63843474 厦门实验室: (0592)5568048 成都实验室: (028)87702708

深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 天津实验室: (022)27360730 郑州实验室: (0371)69350670 杭州实验室: (0571)87219096 宁波实验室: (0574)87736499





Notes:

N1~N8: Batteries at first cycle in fully charged states;

N9~N13: Cells at first cycle at 50% of the design rated capacity;

N14~N23: Cells at first cycle in fully discharged states;

C1~C8: Batteries after 50 cycles ending in fully charged states;

C9~C18: Cells after 50 cycles ending in fully discharged states.

PHOTO OF THE SAMPLE V.





Lithium-Ion Battery 7S3P ICR18650

Iominal / Charge voltage: 25.9V / 29.4V nergy Capacity: 171Wh/6.6Ah

ax. charge current:

5A

ax. discharge current: 10A / Peak 30A

nium-Ion Rechargeable Battery with Protection Circuit Module. Battery must in propriate charger only. Charge: 0 to 45°C, Discharge: -20 to +60°C. Designed and Developed in AUSTRIA**

UTION: Check battery polarity and install correctly. Do not dispose kwards or short circuit, otherwise battery may explode or leak causing

Authenticate the photo on original report only

北京实验室: (010)82618116

上海实验室: (021)64851999 长春实验室: (0431)85150908

天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

青岛实验室: (0532)88706866 大连实验室: (0411)87336618 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 西安实验室: (029)89608785 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499





VI **TEST METHOD**

Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery. Tests T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. Test T.7 may be conducted using undamaged batteries previously used in tests T.1 to T.5 for purposes of testing on cycled batteries.

Report ID: MLIC3ITB97275521

In order to quantify the mass loss, the following procedure is provided:

$$Mass loss(\%) = (M_1-M_2) / M_1 \times 100$$

Where M₁ is the mass before the test and M₂ is the mass after the test. When mass loss does not exceed the values in Table blow, it shall be considered as "no mass loss".

Mass M of cell or battery	Mass loss limit
M<1g	0.5%
1g≤M≤75g	0.2%
M>75g	0.1%

T.1 Altitude simulation

Test cells and batteries shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature (20 \pm 5 °C).

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.2 Thermal test

Test cells and batteries are to be stored for at least six hours at a test temperature equal to 72 ± 2 °C, followed by storage for at least six hours at a test temperature equal to - 40 ± 2 °C. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature (20 ± 5 °C). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

Pony Testing International Group Shenzhen Co., Ltd. Address: 1F., Building 6, Zhongxing Industry City, Chuangye Road, Nanshan District, Shenzhen, Guangdong, China

北京实验室: (010)82618116

上海实验室: (021)64851999 长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618

天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

西安实验室: (029)89608785 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 合肥实验室: (0551)63843474 厦门实验室: (0592)5568048 成都实验室: (028)87702708





T.3 Vibration

Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face.

Report ID: MLIC3ITB97275521

The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12 kg (cells and small batteries), and for batteries with a gross mass of more than 12 kg (large batteries).

For cells and small batteries: from 7 Hz a peak acceleration of 1 g_n is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8 g_n occurs (approximately 50 Hz).

A peak acceleration of 8 g_n is then maintained until the frequency is increased to 200 Hz.

For large batteries: from 7 Hz to a peak acceleration of 1 gn is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 2 gn occurs (approximately 25 Hz). A peak acceleration of 2 gn is then maintained until the frequency is increased to 200 Hz.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and if the open circuit voltage of each test cell or battery after testing in its perpendicular mounting position is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.4 Shock

Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.

Each cell shall be subjected to a half-sine shock of peak acceleration of 150 g_n and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50 g_n and pulse duration of 11 milliseconds.

Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 millisecondsfor small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations.

苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

Address: 1F., Building 6, Zhongxing Industry City, Chuangye

Road, Nanshan District, Shenzhen, Guangdong, China

上海实验室: (021)64851999

北京实验室: (010)82618116

长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 天津实验室: (022)27360730 郑州实验室: (0371)69350670

石家庄实验室: (0311)85376660 西安实验室: (029)89608785 呼和浩特实验室: (0471)3450025 杭州实验室: (0571)87219096 宁波实验室: (0574)87736499

武汉实验室: (027)83997127 合肥实验室: (0551)63843474 广州实验室: (020)89224310 厦门实验室: (0592)5568048 成都实验室: (028)87702708





Battery	Minimum peak acceleration	Pulse duration
	150 g _n or result of formula	
Small batteries	Acceleration(g _n)= $\sqrt{\left(\frac{100850}{mass*}\right)}$	6 ms
	Whichever is smaller	
	$50 g_n$ or result of formula	
Large batteries	Acceleration(g _n)= $\sqrt{\left(\frac{30000}{mass*}\right)}$	11 ms
	Whichever is smaller	

^{*} Mass is expressed in kilograms.

Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.5 External short circuit

The cell or battery to be tested shall be shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of $57\pm4^{\circ}$ C, measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. Then the cell or battery at $57\pm4^{\circ}$ °C shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $57\pm4^{\circ}$ C, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value. The short circuit and cooling down phases shall be conducted at least at ambient temperature.

Cells and batteries meet this requirement if their external temperature does not exceed 170 °C and there is no disassembly, no rupture and no fire during the test and within six hours after the test.



Address: 1F., Building 6, Zhongxing Industry City, Chuangye Road, Nanshan District, Shenzhen, Guangdong, China

北京实验室: (010)82618116 上海实验室: (021)64851999 长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 天津实验室: (022)27360730 郑州实验室: (0371)69350670

苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 西安实验室: (029)89608785 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499





T.6 Impact / Crush

Impact (applicable to cylindrical cells not less than 18 mm in diameter)

The test sample cell or component cell is to be placed on a flat smooth surface. A 15.8 mm \pm 0.1mm diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A 9.1 kg \pm 0.1 kg mass is to be dropped from a height of 61 ± 2.5 cm at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.

Report ID: MLIC3ITB97275521

The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8 mm \pm 0.1mm diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.

Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18 mm in diameter)

A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached.

- (a) The applied force reaches 13 kN \pm 0.78 kN;
- The voltage of the cell drops by at least 100 mV; or
- (c) The cell is deformed by 50% or more of its original thickness.

Once the maximum pressure has been obtained, the voltage drops by 100 mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released.

A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.

Each test cell or component cell is to be subjected to one crush only. The test sample shall be observed for a further 6 h. The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.

Cells and component cells meet this requirement if their external temperature does not exceed 170 °C and there is no disassembly and no fire during the test and within six hours after this test.

T.7 Overcharge

The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:

Road, Nanshan District, Shenzhen, Guangdong, China

北京实验室: (010)82618116

上海实验室: (021)64851999 长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618

深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

西安实验室: (029)89608785 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 合肥实验室: (0551)63843474 厦门实验室: (0592)5568048 成都实验室: (028)87702708







- (a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.
- (b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.

Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours.

Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

T.8 Forced discharge

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer.

The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).

Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

Address: 1F., Building 6, Zhongxing Industry City, Chuangye Road, Nanshan District, Shenzhen, Guangdong, China

北京实验室: (010)82618116

上海实验室: (021)64851999 长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618


天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 西安实验室, (029)89608785 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499





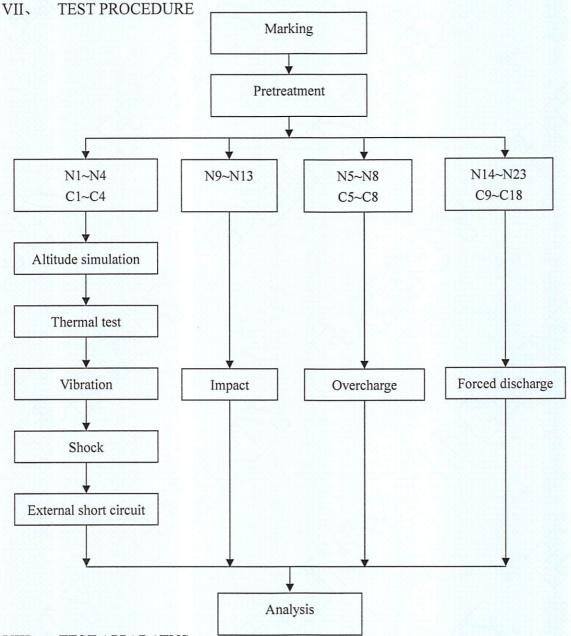

VIII TEST APPARATUS

IE-0121 High precision battery test system

IE-0434 Vacuum drying oven

IE-0090 Multimeter

IE-0322 Tableland air pressure gauge

IE-0294 Programmable DC power supply

IE-0219 Rapid temperature change test chamber

IE-0178 CNS·TC series electronic counting scales

IE-0281 Temperature controlled short circuit testing machine

IE-0514 High precision battery tester

IE-0503 Electric vibration test system

IE-0287 Vertical impact crash test platform

IE-0185 The digital thermometer (TC)

IE-0506 Battery impact testing machine

IE-0511 Programmable DC power source



北京实验室: (010)82618116

上海实验室: (021)64851999 长春实验室: (0431)85150908

深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310

青岛实验室: (0532)88706866 大连实验室: (0411)87336618 天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 西安实验室: (029)89608785 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499



IX DATA

Altitude simulation

	Pre-	-test	Afte	r test	- Mass loss	Voltage	Whether leakage,
No.	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)	(%)	loss (%)	venting, disassembly, rupture, fire (Y/N)
N1	1305.9	29.10	1305.7	29.10	0.015	0.000	N
N2	1298.9	29.14	1298.9	29.14	0.000	0.000	N
N3	1305.4	29.15	1305.2	29.15	0.015	0.000	N
N4	1302.8	29.14	1302.6	29.14	0.015	0.000	N
C1	1302.5	29.14	1302.5	29.14	0.000	0.000	N
C2	1303.6	29.14	1303.6	29.14	0.000	0.000	N
C3	1306.3	29.13	1306.2	29.13	0.008	0.000	N
C4	1307.7	29.12	1307.7	29.12	0.000	0.000	N

2. Thermal test

	Pre-	-test	Afte	r test	Mass loss	Voltage	Whether leakage,
No.	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)	(%)	loss (%)	venting, disassembly, rupture, fire (Y/N)
N1	1305.7	29.10	1305.1	28.67	0.046	1.478	N
N2	1298.9	29.14	1298.0	28.76	0.069	1.304	N
N3	1305.2	29.15	1304.3	28.65	0.069	1.715	N
N4	1302.6	29.14	1301.7	28.64	0.069	1.716	N
C1	1302.5	29.14	1301.9	28.63	0.046	1.750	N
C2	1303.6	29.14	1302.6	28.73	0.077	1.407	N
C3	1306.2	29.13	1305.3	28.64	0.069	1.682	N
C4	1307.7	29.12	1306.4	28.65	0.099	1.614	N



CHotline 400-819-5688 www.ponytest.com Pony Testing International Group Shenzhen Co., Ltd.

Address: 1F., Building 6, Zhongxing Industry City, Chuangye Road, Nanshan District, Shenzhen, Guangdong, China

北京实验室: (010)82618116 上海实验室: (021)64851999 长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 西安实验室: (029)89608785 杭州实验室: (0571)87219096 宁波实验室: (0574)87736499





Vibration 3.

181117	Pre	-test	Afte	r test	Mass loss	Voltage	Whether leakage,
No.	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)	(%)	loss (%)	venting, disassembly, rupture, fire (Y/N)
N1	1305.1	28.67	1305.1	28.67	0.000	0.000	N
N2	1298.0	28.76	1298.0	28.76	0.000	0.000	N
N3	1304.3	28.65	1304.2	28.64	0.008	0.035	N
N4	1301.7	28.64	1301.6	28.63	0.008	0.035	N
C1	1301.9	28.63	1301.9	28.63	0.000	0.000	N
C2	1302.6	28.73	1302.6	28.73	0.000	0.000	N
C3	1305.3	28.64	1305.3	28.64	0.000	0.000	N
C4	1306.4	28.65	1306.3	28.65	0.008	0.000	N

Report ID: MLIC3ITB97275521

4. Shock

	Pre	-test	Afte	r test	- Mass loss	Voltage	Whether leakage,
No.	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)	(%)	loss (%)	venting, disassembly, rupture, fire (Y/N)
N1	1305.1	28.67	1305.1	28.66	0.000	0.035	N
N2	1298.0	28.76	1298.0	28.76	0.000	0.000	N
N3	1304.2	28.64	1304.2	28.64	0.000	0.000	N
N4	1301.6	28.63	1301.5	28.63	0.008	0.000	N
C1	1301.9	28.63	1301.9	28.63	0.000	0.000	N
C2	1302.6	28.73	1302.6	28.73	0.000	0.000	N
C3	1305.3	28.64	1305.3	28.64	0.000	0.000	N
C4	1306.3	28.65	1306.3	28.65	0.000	0.000	N

北京实验室: (010)82618116


上海实验室: (021)64851999 长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618

苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

天津实验室: (022)27360730 郑州实验室: (0371)69350670

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 西安实验室: (029)89608785 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499







External short circuit

No.	Peak temperature (°C)	Whether disassembly, rupture, fire (Y/N)
N1	57.1	N
N2	57.2	N
N3	57.2	N
N4	57.3	N
C1	57.2	N
C2	57.1	N
C3	57.3	N
C4	57.2	N

Impact

No.	Peak temperature (°C)	Whether disassembly, fire (Y/N)
N9	113.4	N
N10	112.8	N
N11	116.3	N
N12	114.2	N
N13	114.6	N

Overcharge

No.	Whether disassembly, fire (Y/N)
N5	N
N6	N
N7	N
N8	N
C5	N
C6	N
C7	N
C8	N



CHotline 400-819-5688

www.ponytest.com

Pony Testing International Group Shenzhen Co., Ltd. Address: 1F., Building 6, Zhongxing Industry City, Chuangye Road, Nanshan District, Shenzhen, Guangdong, China 北京实验室: (010)82618116

天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

上海实验室: (021)64851999 长春实验室: (0431)85150908 青岛实验室: (0532)88706866 大连实验室: (0411)87336618 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)88104651

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 西安实验室: (029)89608785 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499



Page 12 of 12





Forced discharge 8.

No.	Whether disassembly, fire (Y/N)
N14	N
N15	N
N16	N
N17	N
N18	N
N19	N
N20	N
N21	N
N22	N
N23	N
C9	N
C10	N
C11	N
C12	N
C13	N
C14	N
C15	N
C16	N
C17	N
C18	N

*** End of report ***



苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

宁波实验室: (0574)87736499